


# D328

**RACCORDO A 45°  
ORIENTABILE BSPP  
45° ADJUSTABLE UNION WITH  
BSPP THREAD**

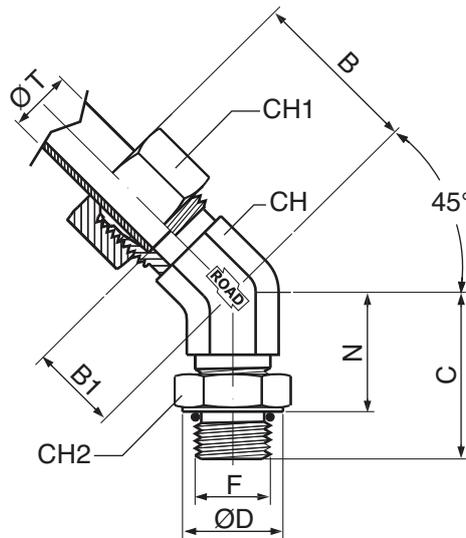

SERIE	T	CODE	F	CH	CH1	CH2	C	N	B	B1	D	Pressure
	Ø			mm	mm	mm	mm	mm ±1	mm	mm	Ø	Wp
L	6	D328-06L-10G	1/8-28	14	14	14	28	19	24,5	9,5	16	315
L	8	D328-08L-13G	1/4-19	14	17	19	29	19	27	12	19	315
L	10	D328-10L-13G	1/4-19	19	19	19	34	22	27	12	19	315
L	12	D328-12L-17G	3/8-19	19	22	22	37	24	29	14	23	250
L	15	D328-15L-21G	1/2-14	22	27	27	39	30	32	17	28,5	250
L	18	D328-18L-21G	1/2-14	27	32	27	45	34	33	17	28,5	250
L	22	D328-22L-26G	3/4-14	33	36	36	50,5	36	35,5	19,5	34,5	160
L	28	D328-28L-33G	1-11	41	41	41	52	38	39	23	44,5	160
L	35	D328-35L-42G	1 1/4-11	48	50	50	54	40	48	27	53	160
L	42	D328-42L-48G	1 1/2-11	48	60	55	54	40	49	26	58	160
S	6	D328-06S-13G	1/4-19	14	17	19	28	20	26	11	19	315
S	8	D328-08S-13G	1/4-19	19	19	19	32	23	28	13	19	315
S	10	D328-10S-17G	3/8-19	19	22	22	34	26	29	13	23	250
S	12	D328-12S-17G	3/8-19	22	24	22	34	28	33	17	23	250
S	16	D328-16S-21G	1/2-14	27	30	27	44	32	34	16	28,5	250
S	20	D328-20S-26G	3/4-14	33	36	36	46	34	40	19	34,5	250
S	25	D328-25S-33G	1-11	41	46	41	51	40	46	22	44,5	250
S	30	D328-30S-42G	1 1/4-11	48	50	50	53	40	50	24	53	160
S	38	D328-38S-48G	1 1/2-11	48	60	55	53	40	55	24	58	160