



ZEC S.p.A.

Via Lungolorno 11 - 42052 Colorno (PR) - Italia

Tel. 0521 816631 - Fax 0521 816772

info@zecspa.com - www.zecspa.com



Capitale sociale: Euro 1.000.000

C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348

Numero REA: PR - 173914

PTFE flexible hose double stainless steel braid I2T Series

- WORKING PRESSURE FROM 150 TO 365BAR
- WORKING TEMPERATURE UP TO 260°C

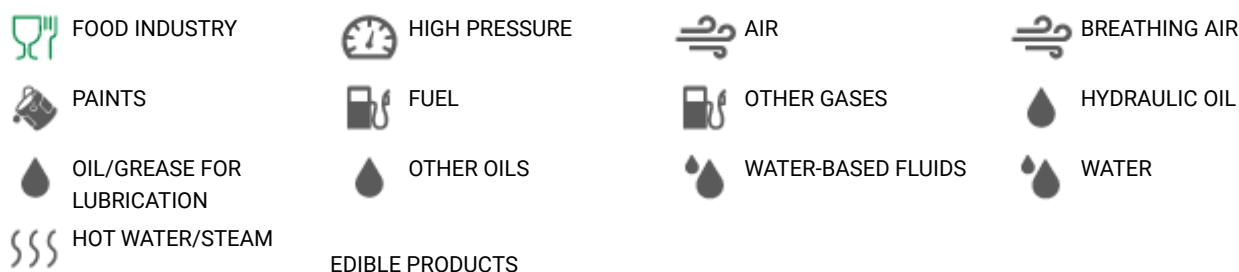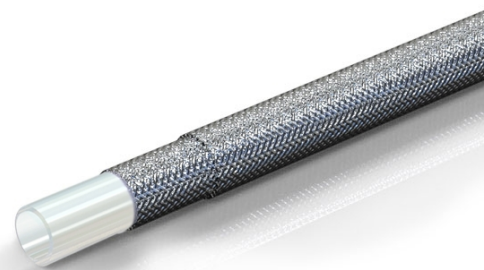

TECHNICAL FEATURES

Metric

Code	ID			OD	T	1:3 WP	R MIN	g/m	Ferrule Code (*)
	inch	mm	DN						
PTFE316I2T	3/16"	4.8	5	9	0.9	365	30	130	BP316R7
PTFE14I2T	1/4"	6.5	6	10.8	0.9	365	35	170	BP14PTFEI2T
PTFE516I2T	5/16"	8	8	12.8	0.9	300	40	235	BP516OL5
PTFE38I2T	3/8"	9.7	10	14.4	0.9	285	50	260	BP38PTFEI2T
PTFE12I2T	1/2"	12.8	12	17.7	0.9	250	70	390	BP12PTFEI2T
PTFE58I2T	5/8"	16	16	21	0.9	235	110	490	BP58R1
PTFE34I2T	3/4"	19	19	24.2	1.0	200	180	630	BP34R7V
PTFE1I2T	1"	25.4	25	31.6	1.1	150	240	730	BP1R7

(*) Possibilità di boccole in acciaio inox / Stainless steel ferrules available

TECHNICAL FEATURES

Technical-constructive features:

Inner core in PTFE with double AISI 304 stainless steel reinforcement braid.

Applications:

Hoses of the PTFE series have been created mainly for the high pressure conduction of paints, oils, air, food and steam. These hoses do not dissipate electrostatic charges when conveying non-conductive fluids.

Working temperature:


from -60°C to +260°C from -76°F to +500°F

Specifications:

Reg. EU 1935/2004, Reg. EU 10/2011. FDA 21 CFR 177.1550. Italian D.M. 174 of 06/04/2004 for use in drinking water supply chain.

It is end user responsibility to check the updated Declaration of Conformity on the reserved area.

PRESSURE CORRECTION FACTOR ACCORDING TO TEMPERATURE

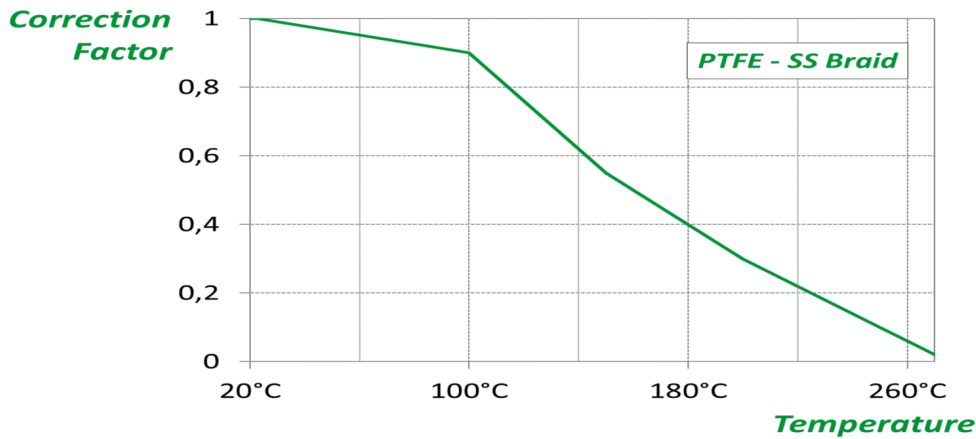

OPTIONAL



Packing



Long Length

NORMATIVE

EU 10/2011
EU 1935/2004
FDA 21 CFR

For any further information about the optional items, please contact the sales office ()