



ZEC S.p.A.

Via Lungolorno 11 - 42052 Colorno (PR) - Italia

Tel. 0521 816631 - Fax 0521 816772

info@zecspa.com - www.zecspa.com




Capitale sociale: Euro 1.000.000

C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348

Numero REA: PR - 173914





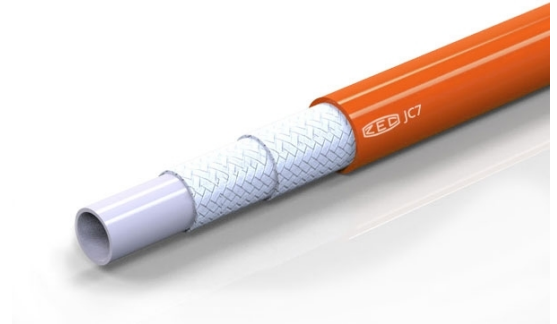

JC7 Series Thermoplastic hose - Water-proof Cover*

- WORKING PRESSURE FROM 200 BAR/3.000 PSI TO 275 BAR/4.000 PSI
- SUPER SLIDING AND ABRASION RESISTANT
- LOW VOLUMETRIC EXPANSION AND PRESSURE LOSSES
- HIGH OPERATING SPEED AND FLOATATION
- AVAILABLE ALSO IN SIZE 1 1/4" -24



TECHNICAL FEATURES

Metric

	 ID			 OD	 1:2.5 WP	 R MIN	 g	
Code	inch	mm	DN	mm	bar	mm	g/m	Ferrule Code
JC767101	1/2"	13.0	12	22.4	275	75	277	BP12JC7
JC777101	5/8"	16.0	16	26.5	220	100	372	BP34JC7
JC787101	3/4"	19.2	19	29.8	207	120	431	BP34JC7
JC797101	1"	25.6	25	37.7	207	150	580	BP1JC7S
JC7107101	1"1/4	32.0	32	46.0	207	235	926	BP114JC7
JC7127101	1"1/2	38.2	38	54.0	207	375	1186	BP112JC7

TECHNICAL FEATURES

Reels length:

80-100-120-150-180-200-250 m

Technical-constructive features:

Inner core in thermoplastic compound, reinforcement in double polyester fiber braid and outside covering in antiabrasion polyurethane, pin-pricked, stabilized to UV rays and resistant to hydrolysis for outdoor applications, in environments having high humidity and saline levels.

Applications:

The JC7 Series hoses have been created for water applications in the high pressure cleaning field.

Working temperature:

from -40°C to +55°C from -40°F to +131°F

Working pressure:

Safety ratio 1:2,5

*The water-proof feature of the cover means that the hose is especially suitable for wet and saline environments where there are extreme temperature changes.

OPTIONAL



Pin-pricking



Color



Cover



Multi-tube



Packing



Long Length

For any further information about the optional items, please contact the sales office ()